


Atek

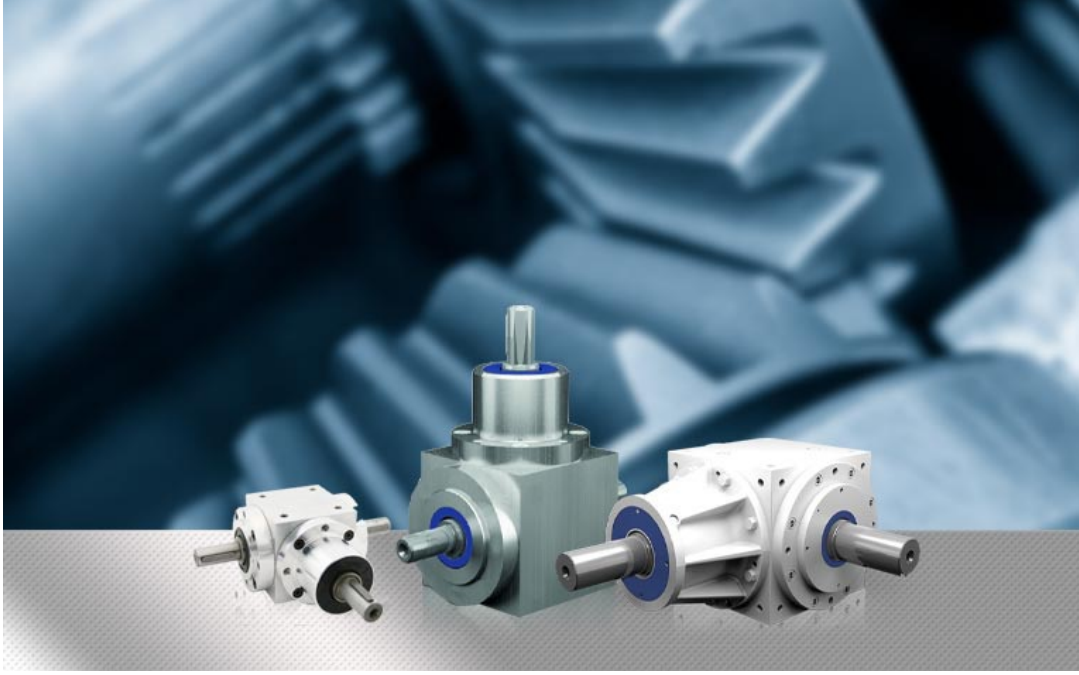

Garanti: 12 ay
Bu ürüne ait Türkiye içi kapı teslim fiyat ve teslim süresi içeren teklifimizi almak için **info@yursat.com.tr** e-posta adresine başvuru yapılabilir ya da ayrıntılı bilgi için +90 224 240 03 04 numaralı telefonumuzdan bizlere ulaşabilirsiniz.
Atek Markası, tedarik süresi için lütfen bizimle iletişime geçiniz.

Firmamız Atek Türkiye Distribütörü veya temsilcisi değildir. Firmamız sipariş durumunda, belirtilen ürünlerde sadece Orjinal ve yeni ürün teklifi sunmaktadır. Bu sitede gösterilen Özel marka adları ve ticari markalar ilgili sahiplerinin mülkiyetindedir, talep durumunda kaldırılmaktadır.

Ürün	Açıklama
301023	Worm gear SC 063 15: 1 B0 -1 + 5 + 6.3- 300 / S1 / 1500 / KN / SOND V 120 / 19x40 - flange No. 601 - low backlash design, <6 arcmin (S1) - with backlash-free coupling ROTEX GS type clamping hub (KN) - suitable for mounting your motor with: Flange: ZK = ø95, 4xø9 on LK = ø130 Shaft: ø19x40 without key - Special version (1500): Actual translation: 30/2 - mathematically accurate Shaft end side 5: ø24k6x46, with keyway (Dimension f1 = 136mm, standard = 118) ***Replacement for 300282***
V 090 1:1 E0N0 -9.9- 1500/SH/B0/ST/S1	206055 Bevel gears (E0N0) - hollow shaft (B0) - lubrication without venting, viscosity 220 (ST) - dust-proof version (SH) - hollow shaft, bore ø20H7 with keyway according to DIN 6885 (S1) - low backlash design, <6 arcmin. *** As supplied with SN 06110136 ***
PTL110	
AST10	
BCT 22	
202749	bevel gear V 160 2:1 A0 -9.6- 750/B1-E1/ST (B1-E1) - Lubrication with ventilation, on side 1, Viscosity 220 (ST) - Dustproof version Colour: primed white. ***** as supplied with our serial no.354628 ***** - Bevel gear - Unit weight: 29 kg, net /piece [gross: 34 kg] - Goods tariff no.: 8483 4023 - Origin of goods: European Community (Germany) *****

LINEER 4-20mA LTP 750A ATEK	
120467	F900.160 drive shaft
121743	bevel gear set KR 160 2:1 WR (GL 16/32) consisting of: - 1x pinion shaft: F890.160-2:1 (GL 16/32), - 1x bevel gear: F895.156-2:1 (GL 16/32)
170196 30208	,ATEK,Picture Pos No: 2
170196 30208	,ATEK,Picture Pos No: 4
EPD11-DDBRR-S35	
V 160 2:1 A0 -9.6- 750/B1-E1/ST	202749 bevel gear (B1-E1) - Lubrication with ventilation, on side 1, Viscosity 220 (ST) - Dustproof version *** As supplied with SN 354628. ***
200011	Bevel gears V 090 1:1 E0N0 -9.9- 700/A0 (V) - bevel gear (090) - housing edge length [mm] (1:1) - translation (E0N0) - Gearbox design - Single-sided shaft on side 3 - Continuous hollow shaft with keyway on the side 5+6 - Page 5: opposite direction of rotation to page 3 - Page 6: same direction of rotation as page 3 (9.) - Fastening thread - in the flanges (page 3, 5, 6) - in the housing (page 1, 2, 4) - Fastening possible on all sides (.9) - Installation position on all sides (700) - Speed of all shafts [1/min] (A0) - Lubrication without ventilation, viscosity 460 Color: primed matt white
BCT-22-25B-A-Y1/4-S-S30	
120467	drive shaft F900.160
121743	Bevel gear set KR 160 2:1 WR (GL 16/32) consisting of: - 1x pinion shaft: F890.160-2:1 (GL 16/32) - 1x bevel gear: F895.156-2:1 (GL 16/32)
170196	Tapered roller bearings 30208
202749	Bevel gears V 160 2:1 A0 -9.6- 750/B1-E1/ST (V) - bevel gear (160) - housing edge length [mm] (2:1) - Translation (A0) - Gearbox design - Single-sided shaft on sides 3 + 5 - Page 5: opposite direction of rotation to page 3 (9.) - Fastening thread - in the flanges (page 3, 5, 6) - in the housing (page 1, 2, 4) - Fastening possible on all sides (.6) - Installation position page 6 (750) - speed of slow-running shaft [1/min] (B1-E1) - lubrication with ventilation on side 1, Viscosity 220 (ST) - dust-protected version Color: primed matt white ***As supplied with SN 354628. ***
V 160 2:1 A0-9.6-750	seri 354628
V 160 2:1 A0-9.6-750	
200613	
201267	
Vc 090 1.5	
L04511eo	GEAR BOX
200794	
200188	
Vc200-6:1-D0-337055	
Ars S 50 1000 Hpl 3 S16 A 8 C	Rotary Encoder 500 Pars Please look at the attachment

209280	
Ta757	WELD CONTROL
Ta546	WELD CONTROL
S063-53/1-CI0	GEARBOX 53:1RATIO