


Bhler

Garanti: 12 ay
Bu rne ait Trkiye ii kapı teslim fiyat ve teslim sresi ieren teklifimizi almak iin **info@yursat.com.tr** e-posta adresine bařvuru yapabilir ya da ayrıntılı bilgi iin +90 224 240 03 04 numaralı telefonumuzdan bizlere ulařabilirsiniz.
Bhler Markası, tedarik sresi iin ltfen bizimle iletiřime geiniz.

Firmamız Bhler Trkiye Distribtr veya temsilcisi deēildir. Firmamız sipariř durumunda, belirtilen rnlerde sadece Orjinal ve yeni rn teklifi sunmaktadır. Bu sitede gsterilen zel marka adları ve ticari markalar ilgili sahiplerinin mlkiyetindedir, talep durumunda kaldırılmaktadır.

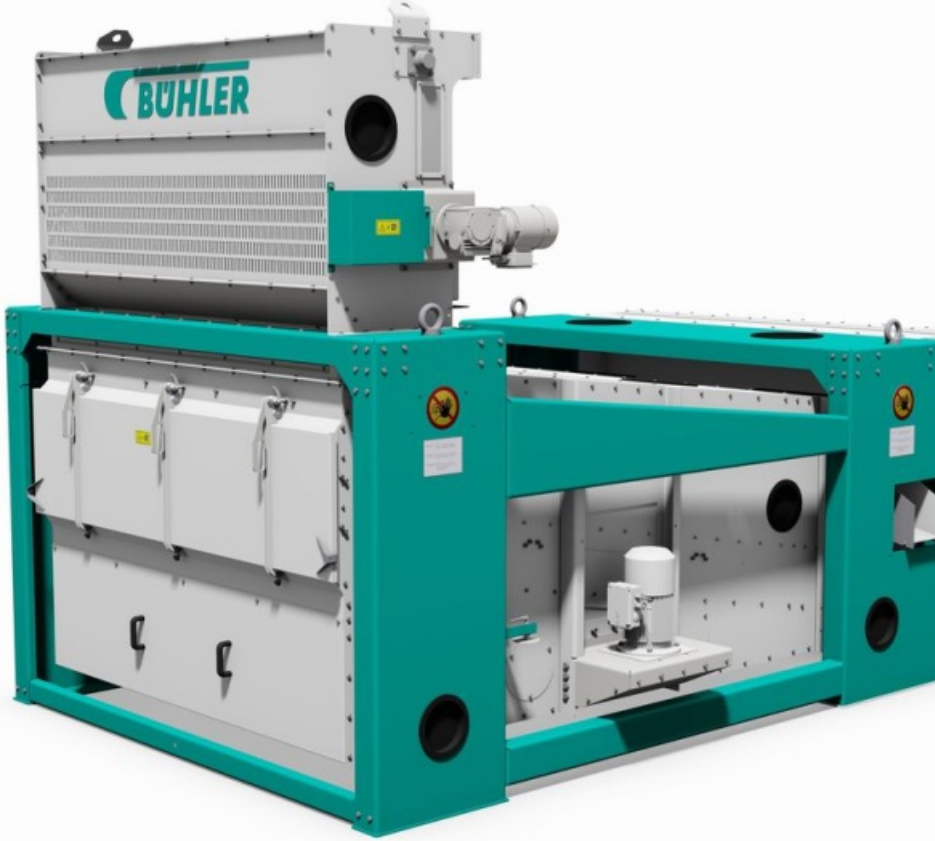

rn	Aıklama
Bhler	24VDC BHLER 1.61.050.46801 MAHLO MOTOR
Sample Gas Cooler Rc1.1	Voltage: 230V 50 / 60Hz Heat exchanger: double PVDF Hose connections / thread: metric Peristaltic pump: without Filter: without Humidity sensor: without Status signal: alarm output HC code: 84195080 Weight 15,000 kg
FI Rd/Be 70w 1761,8	
FI Sp/Be 70w 1761,8	
2888999	Contact MKS 1 / K (NC or NO contact) 90269000
NV 77-XP-HY-5-MS-2M12/820-2S-KN-KT	Level switch for tank installation Version MS, with float SK604 Ventilation filter Hydac BF 7 with filling protection Connector: 2xM12 4-pin Display and control unit 2 x PNP outputs freely programmable 2 x analog output (4-20mA, 0-10V or 2-10V) Measuring range: 25 to 785mm L = 820mm HC code: 90261089

20-9182	
P/N: 113043	
250 MM, REF : VERDUTEX 40-8020	
200705090018 4565999	4 INLET-OUTLET EXCHANGER GLASS TUBE
137002500	Pressotronic 700 pressure transmitter Pressure range 0 ... 250 bar Output 4-20 mA, plug connection M12 Operating voltage: 8-33 VDC Max. Ambient temperature +85 ° C Media temperature: -15 .. + 125 ° C Material: 1.4305,1.4571, Al2O3, FPM Burst pressure: 625 bar Connection: G 1 / 4A
4680999	Gas scrubber type 161 PVDF spec. Material: PVDF
Q11008100 44921120102	Peristaltic condensate pump CPsingle-SA-AC Permit: - Voltage: 115V / 230V 50 / 60Hz Housing: Housing version for separate assembly Flow rate / material: Q = 0.3 l / h with Tygon hose (Norpren) A-60-G Connection: angled hose connector -PVDF
Q11009751 1008000	Level switch for tank installation NT M-MS-G3 / 4-M3 / 500-2K Container connection: G 3/4 2 x contact K8 (NC / NO) L = 500mm 2 x K8 at the lowest point NO
NT 63-K-MS-M3/1270	Q11012362 1063000 Level switch tank installation Version MS, with float SK604 PU Resolution: 5mm L = 1270mm / 0 to 100°C = 4-20mA L1 = 25mm (20mA) / L2 = 1235mm (4mA)
EGK 4S 4 CHANNEL GAS COOLER	
SAMPLE GAS COOLER RC1.1 DOUBLE CHANNEL	
SAMPLE GAS COOLER RC1.1 SINGLE CHANNEL	
102509P 254x1,5x32 mm	
SP 04 G/03	63-003-07 230V/50Hz 7,2U/min Norprene hose 3.2x1, 6x126 A-60-G Engine SM 131
Q11017165 1038000	temperature switch TSM-2-MS-G1/2-M3/280-TM50NO/TM70NC Version brass L = 280mm 1 x thermal contact TMS-50 °C normally open 1 x thermal contact TMÖ-70 °C opener
PT-771-600-1S-K	Q11019084 1377000 display and control unit with attached transmitter 0-600bar Plug connection: M12x1, 4-pin. 1 x PNP - freely programmable output and analogue output (4-20mA, 0-10V or 2-10V) Connection: G1/4, bursting pressure: 900bar Media temperature: -15...+125°C, Ambient temperature: +85°C
137002500	Pressure transmitter Pressotronic 700 Pressure range 0...250 bar Output 4-20 mA, connector M12 Working voltage: 8-33 VDC Max. ambient temperature +85 °C Media temperature: -15...+125°C Material: 1.4305,1.4571,Al2O3,FPM Bursting pressure: 625 bar Connection: G 1/4A

Sortex B	(wie bild)
Q11021962 4596211022600000000000	Sample gas cooler RC1.1 Voltage: 230V 50/60Hz Heat exchanger: double stainless steel Hose Connections/Threads: Metric Peristaltic pump: none Filters: without Humidity sensor: without Signal outputs: status output
Q11022112 44921120101	Peristaltic condensate pump CPsingle-SA-AC Permit: - Voltage: 115V/230V 50/60Hz Housing: Housing version for separate assembly Flow rate/material: Q=0.3 l/h with Tygon tubing (Norprene) A-60-G Connection: Straight hose tail - PVDF
9124030034	Hose for peristaltic pump Q=0.3 l/h Material: Norprene / PVDF
NIVOVENT 21-0-SML 96484-1 LEVEL LIQUIDATOR	
2150S232 :LIGHT ASSEMBLY DELTA ABRASIMET	
sample gas pump 4228114101100	(Sample Gas Pump P1.1E—Voltaj: 230V—Pompa Kafası: PVDF)
1.13.042.402	
9100110124	Display board ABT400
Q11024699 1064000	Level switch tank installation NT 64-MS-2M12/250-1K-TK70NC Switch tube MS and float SK601 PU 1 x contact (K101) NC/NO 1 x temperature contact TKÖ-70 (70°C opener) L = 250mm L1 at lowest point NO
Q11024879 1008000	Level switch tank installation NT M-MS-G3/4-M3/250-1K-TM70NC Tank connection: G 3/4 1 x contact K8 (opener / closer) Temperature contact TMÖ-70 (70°C opener) L=250mm 1 x K8 at the lowest point NO
MVR5-50031-010	PILOT CONTROL DIAPHRAM EPT 1140
MVR5-83000-810	SHAPE DIAPHRAM EPT 1140
UNN-48004-013	COMPRESSOR SPRING
113042402	1.13.042.402
Q11027102 4228123111200	Sample gas pump P1.1E Voltage: 230V/50Hz Pump head: PVDF with adjustable bypass valve; Head turned 180° Valves up to 70°C Including screw-in fittings DN 4/6 Incl. mounting bracket and anti-vibration set Housing version with 3m connecting cable and on/off switch
Q11029175 44921120101	Peristaltic condensate pump CPsingle-SA-AC Permit: - Voltage: 115V/230V 50/60Hz Housing: Housing version for separate assembly Flow rate/material: Q=0.3 l/h with Tygon tubing (Norprene) A-60-G Connection: Straight hose tail - PVDF v
	Level switch tank structure NS OM-VA-MKS/550 with float

Q11033791 1083000	SK903 L1 = 550mm including surge protection pipe
2888999	Contact MKS 1/K (opener or closer)
2889999	Contact MKS 1/W (changer) (Reed switch approvals) UL NRNT2 E70063 CSA 3105897
Q11034484 1077000	Level switch for tank installation NV 77-XP-HY-5-MS-2M12/280-2S-KN-KT-VS Version MS, with float SK604 Ventilation filter Hydac BF 7 with filling protection and contamination indicator Connector: 2xM12 4-pin Display and control unit 2 x PNP output freely programmable 2 x analog output (4-20mA, 0-10V or 2-10V) Measuring range: 25 to 245mm L=280mm
Q11034484 1077000	Level switch for tank installation NV 77-XP-HY-5-MS-2M12/370-2S-KN-KT-VS Version MS, with float SK604 Ventilation filter Hydac BF 7 with filling protection and contamination indicator Connector: 2xM12 4-pin Display and control unit 2 x PNP output freely programmable 2 x analog output (4-20mA, 0-10V or 2-10V) Measuring range: 25 to 335mm L=370mm
4501040	Heat exchanger DTV Material PVDF Gas inlets/outlets DN 4/6 Condensate outlets DN 5/8
MKS 1/W (Wechsler) Contact	2889999 (Reed switch approvals) UL NRNT2 E70063 CSA 3105897
Q11036781 1008000	Level switch tank installation NT M-MS-G3/4-M3/250-1K-TM70NC Container connection: G 3/4 1 x contact K8 (opener / closer) Temperature contact TMÖ-70 (70°C normally closed) L=250mm 1 x K8 at the lowest point NE
Nt61-MS-S6 / 320-2w	
Ovt4c-4-0-0-14-3-1-00-00-00-14	
4200015-2	
25 2114 20 02 00	
Dts-6	DTS-6 4501023
4202002-5	
25 2070 20 02 00	
Fgf 4w 20017000	
Lief.-Nr. : 1.61.050.468	Geared motor 24VDC 0.75A; 5000mNm; 7,2rpm max 7000mNm; 7.6 ohms; 6Stufen Translation 377
4220011-1	
4200075-1	
1.13.021.602	DC motor; 24VDC; Ø31mm; round; 0.65A; 11W; 32,0mNm; nN 320rpm; n0 4300 RPM;