


Nord

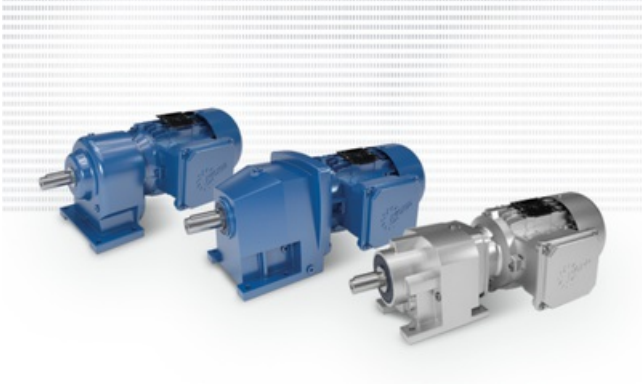

Garanti: 12 ay

Bu rne ait Trkiye ii kapı teslim fiyat ve teslim sresi ieren teklifimizi almak iin **info@yursat.com.tr** e-posta adresine bařvuru yapabilir ya da ayrıntılı bilgi iin +90 224 240 03 04 numaralı telefonumuzdan bizlere ulařabilirsiniz.

Nord Markası, tedarik sresi iin ltfen bizimle iletiřime geiniz.

Firmamız Nord Trkiye Distribtr veya temsilcisi deęildir. Firmamız sipariř durumunda, belirtilen rnlerde sadece Orjinal ve yeni rn teklifi sunmaktadır. Bu sitede gsterilen zel marka adları ve ticari markalar ilgili sahiplerinin mlkiyetindedir, talep durumunda kaldırılmaktadır.

rn	Aıklama
Ig Ku 10-30v Htl 512 D=12 5020 1,5m	19651131 Successor material for item number 19551131 *****
SK 520E-750-340-A (275520075)	FREQUENCY CONVERTER Type of frequency converter / starter SK 520E-750-340-A Degree of protection converter / starter IP20 Phases x voltage (V) 3 x 400 Nominal output FU (kW) 0.750 Nominal output FU (HP) 1,000 Output frequency (Hz) 0 - 400 FU: input voltage 3AC 380-480V, -20% / + 10%, 47-63Hz Output current (A) 2.3 Input current (A) 3.2 Ambient temperature FC / starter 0 ° C + 40 ° C (S1), 0 ° C + 50 ° C (S3-70%) Design / data 5x digital inputs 2x relay messages 1x analog output Additional control signals 2x Dig IN, 2x Dig OUT CANopen interface on board Incremental encoder input (TTL) 2 analog inputs Weight approx. 1,600 KG / ST
GHE40L 480V	DISPOSABLE RECTIFIERS YELLOW
GHE40L 480V	DISPOSABLE RECTIFIER GHE40L 480V YELLOW
GEARED MOTOR SK01F AL-71LP/2 TF	As the number 200 798 205-100 14 952 890 however in IE3
SK172.1F-80SP/4 CUS TW	Execution: as already delivered with the serial number 201773617-100, but with motor in IE3 (energy efficiency class) ----- ----- Product name helical geared motor Motor type CUS Engine speed 1,420 rpm Translation 13.54 Output speed 105,000 rpm Service factor 1.70 Output torque M2 (Nm) 50.10 Power (kW) 0.550 Voltage (V) 230/400 Frequency (Hz) 50 Efficiency class Premium EFF according to EISAct Operating mode S1 Motor protection class IP55 Insulation class F Nominal current 1 (AMP) 2.23 Nominal current 2 (AMP) 1.29 Cosine 1 0.75 Ambient temperature of the motor 40 ° C Type gearbox M1 Housing type flange B5 Shaft dimension 25X50 Part number special shaft 00000000057130030 Flange diameter (mm) 160 Venting Pressure venting Thermal motor protection Thermal monitor as an opener Connection

	type star Terminal box position / cable insert 3 / III Type of lubricant Synth. Oil ISO VG 220 Class oil CLP PG 220 Lubricant quantity (l) 0.270 Color 9006 white aluminum Paint type solid paint Painting instructions old painting 2 Painting instructions Basic (2) CE logo yes CCC Logo No. Mexico Certificate NOM No. UL E191510 CSA 189340 DoE CC CC 092 B CSA ev 189340 Alto Rendimento No. Korea Energy Label No. Weight approx. 13 KG / ST
69/43575/9006	können sie uns auch für die Anderen bilder ihren Angebot schicken
F 180 D345 H340 IL1	10121607 EXTERNAL FAN
:9614573	
100LH/4	
132M/4-2 BRE100 HL MIK SR	
132MP/4 TF	
132MP/4 TF (nr.36813781)	
132S/6 BRE60	
132SH/4 TF	
160MP/4 TF	
17121630	
180MP/4 TF	
180MP/4 TF RLS	
19141000 GVE20L	
1SI40	
200296645-10	
200766526-100.147.49722	
26141005	
2SIEK100L-4A	
2SIEK112M-4	
3282AFB-90S/4	
34212689	
4500099	
50671080(Pos.300)	
508 7000-2 29 08	

50870050 (Pos.400)
5147207-120Z14
51572030
52670030
5NM FDB08 P
632
655
6KANT 5NM D=15 P
700
71 S/4 TF
741
78900060/11E300035162
8/5007547487
80S/4 TF
89271140
90LH/4 TF (34511190)
90LH/4BRE20 HL TFIG12
90SH/4 TF TI4
ANTNO
DRIVING PINION-306
EV063.00-90S/4a
GVE20L (230V SCHWARZ)
IG KU 10-30VHTL 1024 D=15 A02H 1.5M
KR273.03-90L/4a
KU 85C 81N4 TF FL IG
NO:620 OUTPUT GEAR
NO:635 SHIM
NO:650 CIRCLIP
NO:653 SHIM
NO:701 DRIVE GEAR
NO:735 SHIM

NO:740 CIRCLIP
PMEA 500-S 07/11 CE
PMG500-S
RED SK 372 . 1F/3D-100 L/4/3D TF
RED SK 4282 AFSH-30-112 M/4 TF-3D
RED SK 772-132 S/4
RED SK 873-112 M/4 TF
RJ12/SUB-D SO RS232
SK 0250-71 S/4 BRE4
SK 1 S 140 i: 5.00
SK 100 LA/4
SK 1550 71L/4 I: 49
SK 180MX/4 BRE150TF F
SK 25F-100LA/4 KOM-NR 224446
SK 273- 71 S/4
SK 472-90 S/4 TF
SK 500E-370-323-A
SK 51 EF-160 LA/4
SK 62 225S/4 TF
SK 620 F AL-112 M/4 TF
SK 63SX/4 CUSWEMS
SK 90431 LX-71S/4
SK 92372.1AFBH / 2G-100LH / 4 2G TF
SK01F F
SK02 S160 /50697090
SK02040AF-63S/4 BRE5
SK02-63S/4 BRE5
SK11EF-71L/4 TF I:2,04
SK12063AZBH-100L/4
SK12063AZBH-100L/4 BRE40

SK-180M/4 NR:100630907.00	
SK1SI 063-80L4	
SK1SI40-IEC71-71S/4	
SK1SI50 S/N:150865160	
SK1SI63F-IEC90-90SH/4	
SK20 120X 80 LK100	
SK2282ABHG-90L/4	
SK25 FAL- 100L/4TF, I:8,09 M1	
SK25 FAL- 100LA, 4TF, I:6,82 M1	
SK32 IEC112-112M/6 BRE60 F IG12KK	
SK3282AFB-90SH/4	
SK43125 AZ-90SH/4 BRE 20	
SK5285 AZZSIEC180	
SK62-180LP/4 TF	
SK700E E 5.5 KW	
SK8282VF VL2 IEC250	
SK872.1-180LP/4 TF	
SK9032.1AZ-IEC132	
SK9032.1LX-132MP/4 TF SH	
SK9072.1AZ-IEC132	
SK90LP14 TFF SN : 253553325	
SK90LP14 TFF SN : 253553326	
SK9282VF VL2-IEC315	
WAR: 81N4 TFFLIG	
63LP/4 CUS BRE5 HL RG	Execution: as already delivered with the serial number 201487081-100, but only motor in IE3 (energy efficiency class) ----- ----- Product naming engine Engine type CUS Engine speed 1,705 rpm Ambient temperature motor 40°C Power (kW) 0.180 Voltage (V) 230/400 Frequency (Hz) 60 Efficiency class Premium EFF according to EISAct Operating mode S1 Insulation class F Rated current 1 (AMP) 1.07 Rated current 2 (AMP) 0.62 cosine 1 0.57 motor position motor attachment WN Pos 101 Motor flange 160S Connection type star Degree of protection motor IP55 Terminal box position / cable entry 3/II CE Logo Yes CCC logo no Mexico Certificate NOM No UL E191510 CSA 189340 DoE CC CC 092 B CSA ev

	189340 High Rendimento No Korea Energy Label No Braking torque (Nm) 5 Braking voltages 400VWS-180VGS Supplier brake Precima Hand release With hand release Position of hand release 3 Brake rust / dust protected Rust-proof version Brake connection GR wired directly to the motor Degree of protection brake IP55 Part number engine seal 50697090 Color approx. 9007 gray aluminum Paint type solid paint Painting specification old painting 2 Painting instructions basic (2) Cable gland + O-ring 18524200 NPT adapter Loose part hand release lever engine gasket Weight approx. 7 KG/pc
SK772.1-132SP/4TF	
SK972.1-160LP/4TF	
SK 52-132MP/4TF	
SK 52-160MP/4TF	
SK4282AG-100AP/4 BRE40 TF	Version: as already supplied with serial number 201425499.100, but with motor in IE3 (energy efficiency class) ----- Product designation flat gear brake motor Motor series asynchronous motor PREM AL (B) Motor type three-phase motor. Engine speed 1,450 rpm Translation 40.74 Output speed 36,000 rpm Service factor 1.90 Output torque M2 (Nm) 805.00 Power (kW) 3,000 Voltage (V) 400/690 Frequency (Hz) 50 Efficiency class IE3 Operating mode S1 Degree of protection motor IP55 Insulation class F Rated current 1 (AMP) 6.26 Rated current 2 (AMP) 3.63 cosine 1 0.80 Design gearbox M3 Hollow shaft housing type Shaft dimension 50H7 Vent Pressure Vent Rubber buffer With rubber buffer Thermal motor protection PTC thermistor, 3x155°C Circuit type triangle Terminal box position / cable entry 3/III Braking torque (Nm) 40 Braking voltages 24 VGS Supplier brake Precima Brake connection without GR, wired to terminal Degree of protection brake IP55 Fast switching rectifier Without brake rectifier Type of lubricant Mineral oil ISO VG 220 Class oil CLP 220 Amount of lubricant (l) 4,400 Shade 7031 blue-grey Paint type solid paint Painting specification old painting 2 Painting instructions basic (2) CE Logo Yes CCC logo no Mexico Certificate NOM No UL no CSA no DoE CC No CSA ev no High Rendimento No Korea Energy Label No Loose part rubber buffer/Met rubber Weight approx. 96 KG/pc
100AP/4 BRE40 TF	
SK9032.1AZBH-IEC132/2G	GEARBOX: SPEED SCREW CONVEYOR
SK42-100L/40 3KW I:17,71	
SK9052.1AZDSH-132/4BRE60 TF	
SK33NAB 63L/4TF Power	
SK 80SH/4 3D TF	IPA Automatic Weighing Unit

SK160LP/4BRE150FHLMIKTE	PTA Chain Conveyor
SK160LP/4TF	PTA Chain Conveyor
F160 74-155 W 1420-1450 D/DK	EXTERNAL FAN F160 EXTERNAL FAN FOR AFINATION MUSCULAR PUMP MOTOR
SK9072.1R W	Alternative type to the gearbox SK9062R W from serial number 1001373260.00 ----- ----- Product name bevel-helical gearbox-W assumed engine speed 1,400 Translation 41.11 Stages 3 n2 assuming n1 34,000 1/min Operating factor 1.00 Output torque M2 (Nm) 7,700.00 Max. output torque M2 max. (Nm) 7,700.00 M1 gearbox design Housing type foot housing Selection of attachment cylinder W Add-on cylinder W Position of the output shaft Shaft at B Wave size 90X170 Venting open, with transport lock Backstop gearbox with backstop Direction of rotation B-side, CW direction of rotation Right Drive shaft dimension W-cylinder 42X110 Lubricant type mineral oil ISO VG 220 Class oil CLP 220 Quantity of lubricant (l) 10,000 Color 7031 blue gray Paint type: normal paint Painting instructions Basic (2) Attention: The service factor is less than or equal to 1.0. The gearbox becomes longer constant demands on the installed motor power are overloaded. For damage that occurs resulting from this, we cannot assume any warranty.
Sk32-112mp/4 Cus Tf	
Sk11003fct	REDUCER GEARBOX
51572010	
Sk 12080-S90-4 Bre20 HI	
Sk6382azg-160I/4	
1006488170	
8206361441.00	MOTOR 19.8/9.9AMP 7.5HP 1735RPM 3PH 230/460V 60HZ
Sk92072afbhn140	GEAR
02040Ix-80s/4	MOTOR .75 HP 3PHASE 1710 RPM
1007513601	
8003424964	WORM GEARBOX 0.50HP 60HZ HOLLOW SHAFT B14 FLANGE
War: 81n4 Tffligá;	
Sk22002cb7702207	PC BOARD
Sk12063afbhn66/3d-80I/4 201289540-800	
Sk7382ax-180Ix/4 RIs	
100I/4 Cus Bre20 HI	
19031932	

1006488060	
Bu-3218	
Sk82-250mh/4 Bre400 Tw F	
Sk700e-112-340-A	DRIVE INVERTER
Part No 631 For Sk12063azbh-100I/4	
Sk-300e-550-340-B	POWER CONTROL 380-480VAC -10-40C RANGE
Sk25f-100Ib/2	
Blower Cooling Fan Option	
Sk80Ih/4-Bre10-Sr	
110593	ELECTRIC RTD GUN E700W HEATER 240VAC 50/60HZ 200W
19141010	
1/8108306274.00	GEARBOX 68.61RATIO 1750RPM
51573010	
Sk12063afbh66/3d-80I/4 Tf F/3d	
71I/4bre5	
328918d	OPERATOR INTERFACE VISTA
89272090	
8005425830	WORM GEARBOX 60HZ HOLLOW SHAFT B14 FLANGE
1006488074	
Sk700e-221-340-A	INVERTER DRIVE 380/460V
Sk5285 Azzsiec180	
275420110	INVERTER DRIVE 3PH 480VAC 47-63HZ 1.5HP
19020936	
72jd35afa	STARTER FOR ELEVATOR 55AMP 575V
Bre 40 205v P	
Sk6382azg-160I/4 Cus Bre250 HI Tw	
1074651	DRIVER GUN LOGICOMM 3AMP TERMINAL BLOCK 4CHANNEL
Sk 02f VI-63 L/4	
Sk3282 Agbh-100	
1006488056	

Sk171.1f-71l/4 Tf 1057404	GLUE HEAD
1006488027	
222297-P02	CONTROL BOARD
19100112	
Sk 112mp/4 Cus Tf F	
Sk 272f-80 L/4	
1006487627	
Sk2282afbhlvf	GEAR BOX
Sk22-100lh/4	
Sk9012.1az-N140tc	MOTOR REDUCER 45.65:1 3540TQ/IN 2SPEED
1007475190	
19021944	
Sk711/4bre5	
Sk90721n250tc	SPEED REDUCER
Sk71s /4	GEAR MOTOR WITH PUMP WATSON
91rd34afa	SOFT-START CONTROLLER
Sk-2282-Azbh-Iec100/2g-4.51	
Sk6282ax-180mx/4	
Sk4282ag-90-L/4	
Sk370/1fct	.5HP 230V AC DR
Sk11ef-71l/4 Tf Obsolete!! Replaced By Sk171.1f-71l/4 Tf	
76055035	DRIVE FREQUENCY INVERTER 3PH 380/460VAC 50/60HZ
1006495085	
111096	APPLICATOR HOSE 230VAC 5/8IN DIA 520W 16FT
51571050	
Sk672.1f-VI-N210tc	SPEED REDUCER 3186NM 3.58:1RATIO
9012.1az-N140tc	GEAR REDUCER 55:17RATIO 3540LB/IN TORQUE
Type:112m/8-2 Bre60 No:9614573. - 00 Kw:0.75/3.0 A:3.08/7.24-415v 50hz 1/Min:0680/2880	

605955	
Sk520e751340a	FREQUENCY INVERTER
Sk22100l4cus	GEAR MOTOR
Sk8382ag-160lh/4 Tf	
B31 Sk9032.1lk-132	
Sk4000/3ct	5HP 460V AC DR
Sk93-180mh/4 Bre250 Tf	
Sk90sh/4 Tf , By 90sp/4 Tf	
Sk52-180lp/4 Tf	
112mp/4 Tf	- in current IE3 version (mandatory from 0.75 KW) -like 1006438988-00 Product name engine Engine speed 1,440 1 / min Power (kW) 4,000 Voltage (V) 230/400 Frequency (Hz) 50 Efficiency class IE3 Operating mode S1 Insulation class F Rated current 1 (AMP) 13.60 Rated current 2 (AMP) 7.85 Cosine 1 0.83 Motor position motor WN Pos 098 Motor flange 160S Thermal motor protection PTC thermistor, 3x155 ° C Circuit type star Degree of protection motor IP55 Terminal box position / cable insert 2 / I CE Logo Yes CCC Logo No. Part number engine seal 50697070 Painting instructions Without painting Lost part engine seal Weight approx. 32 KG / ST
Bre 5 205v P	
100ap/4 Tf	- in current IE3 version (mandatory from 0.75 KW) - like 35512071 Product name engine Engine speed 1,460 1 / min Power (kW) 3,000 Voltage (V) 230/400 Frequency (Hz) 50 Efficiency class IE3 Operating mode S1 Insulation class F Rated current 1 (AMP) 10.50 Rated current 2 (AMP) 6.06 Cosine 1 0.81 Motor position motor WN Pos 903 Thermal motor protection PTC thermistor, 3x155 ° C Degree of protection motor IP55 Terminal box position / cable insert 1 / I CE Logo Yes CCC Logo No. Painting instructions Without painting Weight approx. 28 KG / ST
1074651a	DRIVER GUN LOGICOMM 1PH 3A TERMINAL BLOCK 4CHANNEL
2302	MELTING UNIT 20LB/HR DUAL ACTING 2HOSE 18.7CAP
303541a	MANIFOLD CHANGEOVER ASSEMBLY 240V/420W 7PIN
88297000	
Sk12063azsh-80lh4/Cus	GEAR MOTOR 1HP 1750RPM 3PHASE
Sk22-80lh/4	GEAR MOTOR 1HP 1750RPM 332/575V 2.6/1.5AMPS
Sk0282nbag-63s/4 Bre5 HI Tf We	
Sk6382az B-F	

Sk750/1fcb	Compact Basic
Gve20l	
Sk52-160mh/4	
Sk90421lxiec112	GEAR
Sk-250/1-Fct	.33H 230V AC DR
71s-42cus	MOTOR 3PHASE 60HZ 1600/3305RPM
Pa-2302-07	CONTROL PANEL
90sp/4 Tf	
Sk1sis50h-N56c	
Sk4390	GEAR MOTOR
Sk2su3 2-63s/L/4	
201439245-1	
Sk 71l/4 Tf F	
Sk1smi63az-Iec90-9	
136899b	TC200 TEMP CTRL
Sk42125azbh F	
Ghe40l	CIRCULAR RECTIFIER GHE40L 480V YELLOW
Typ:Sk52-132 S/4, Nr:2305378650.00 002 Obsolete, Replacement Sk52- 132sp/4 Tf	
Sk63180tc2	GEAR REDUCER
Sk71s-4-2	MOTOR 460V .51-.70AMP 60HZ
200404601-1	GEAR REDUCER DOUBLE SHAFT/FOOT W/SERVO ADAPTER
Sk-92372-80s/4	GEARMOTOR RIGHT ANGLE HELICAL-BEVEL
Sk42-W	IN-LINE HELICAL REDUCER
Sk 11000/3 Ct	Frequency Converter Unit
Sk 01f Al-90 S/4 Tf	Please look at the attachment
50783020	
160l/4	
272716	GLUE GUN AUTOMATIC 520A 80A
Sk9082.1 VI-180lp/4 Tf F	

Fdb 13 C	
Typ Sk12063adp0bf90l16/2wu	
1006488068	
Sk90121-N140tc	GEAR MOTOR REDUCER 20.87:1 RATIO 84RPM 3540LB-INTQ
160mh/4cus	AC MOTOR 15HP 3PHASE 36/18AMP 230-460VAC 11KW
131739	POWER SUPPLY PS-40 CONVERTS 100-240VAC 24VDC
1256c20-71l/4cus	GEARMOTOR 1.90/.95AMP 230/460V 1720RPM
71s/4	- like 42010400 Product name engine Engine speed 1,380 1 / min Power (kW) 0.250 Voltage (V) 230/400 Frequency (Hz) 50 Operating mode S1 Insulation class F Rated current 1 (AMP) 1.32 Rated current 2 (AMP) 0.76 Cosine 1 0.77 Motor position motor WN Pos 951 Circuit type star Degree of protection motor IP55 Terminal box position / cable insert 1 / I CE Logo Yes CCC Logo No. Painting instructions Without painting Weight approx. 5 KG / ST
Sk52 VII80lx/ 4 Tf	
90lp4cus145tcbre	GEAR MOTOR/ (90LP/4 CUS 145TC BRE20 HL RG T) PREMIUM EFFICIENT BRAKE MOTOR ONLY
Sk13f-63s/4 Bre5 HI Tf We	
Sk52-132sp/4 Tf	
180lp/4 Tf	Version: as already delivered with the serial number 200776151-100, but without Gear and motor in IE3 version (energy efficiency class) Product name engine Engine speed 1,475 1 / min Power (kW) 22,000 Voltage (V) 400/690 Frequency (Hz) 50 Efficiency class IE3 Operating mode S1 Insulation class F Rated current 1 (AMP) 39.30 Rated current 2 (AMP) 22.70 Cosine 1 0.87 Motor position motor. WN Pos 025 Thermal motor protection PTC thermistor, 3x155 ° C Circuit type triangle Degree of protection motor IP55 Terminal box position / cable insert 1 / I CE Logo Yes CCC Logo No. Painting instructions Without painting Weight approx. 133 KG / ST
Sk700e7523400	INVERTER
Sk32n140tc	GEAR MOTOR
Sk8731100la4cus	GEAR MOTOR
275128c	CONTROL BOARD
Sk13080az-71s/4	
1006488122	
Sk9092.1 VI 200l/4tf Obsolete!! Replaced By Sk9092.1 VI-225rp/4 Tf F	

Sk372_1-80l/4 Cüs	MOTOR 3PH 1550RPM 1HP 3.66AMP 230/460VAC .75KW
157163f	POWER SUPPLY BOARD W/4IDE PORTS
63s/4	Product name engine Engine speed 1,335 1 / min Power (kW) 0.120 Voltage (V) 230/400 Frequency (Hz) 50 Operating mode S1 Insulation class F Rated current 1 (AMP) 0.95 Rated current 2 (AMP) 0.55 Cosine 1 0.64 Motor position motor WN Pos 001 Motor flange 160S Circuit type star Degree of protection motor IP55 Terminal box position / cable insert 1 / I CE Logo Yes CCC Logo No. Painting instructions Without painting Weight approx. 3,600 KG / ST
Sk 71l/4	
Sk1si50	
91ej35aoa	SOFT-START CONTROLLER
Sk93-180mx/4 Bre250 Tf	
Sk52f	
Sk5282az-132mp/4 Tf	
19041922	
500e-550-340-A	Type Frequency Inverter / Starter SK 500E-550-340-A Rated power FU (kW) 0,550 Rated power FU (HP) 0,750 Ambient temperature FU / starter 0 ° C + 40 ° C (S1), 0 ° C + 50 ° C (S3-70%) Output frequency (Hz) 0 - 400 Output current (A) 1.7 Input current (A) 2,4 Execution / data system bus PTC input Integrated power supply 24VDC Diagnostic Interface. RS232 RJ12 RS 485 RJ12 Status LEDs 5x digital inputs 2x analog inputs 2x relay messages 1x analog output Mat Inverter / starter 275420055 Ingress protection inverter / starter IP20 Phases x voltage (V) 3 x 400 FU: Input voltage 3AC 380-480V, -20% / + 10%, 47-63Hz FU: UL approval Yes FU: EAC release Yes Weight approx. 1,600 KG / ST
Sk 90lh/4(34711689), By 90lp/4 Tf(34711678)	
Sk132 Mh/4tf	
H204tlp	GLUE GUN HEAD AUTOMATIC 4MODULE 310W 240V 50/60HZ
Sk3282azbf	PART
Sk22-100lh/4 Kty Ig12	
Sk83-132 S/6-Tff	
1029398	DRIVER MODULE 2CH MODEL HD2A
278003700	INVERTER VECTOR MC 47-63HZ 0.37KW 230V
Fdb 15	
Sk1563a8l4	GEAR BOX

Sk82-250mh/4	
Sk90s/4 Bre20 HI	
D82148005	LOGIC BOARD REDUCED VOLTAGE STARER 460VAC 60HZ 3PH
G. Sk 12063ad	
110593d	ELECTRIC RTD GUN E700W HEATER 240VAC 50/60HZ 200W
135117a	MEMORY BOARD ADD ON
76927	
Sk93f-180mx/4 Bre150 Tf F Wie Geliefert Mit S/N 200754896	
105987	PC BOARD FHM DIGITAL 8CH I/O ASSEMBLY
9834i02	MOTOR BREAK DC SOLID STATE 18AMP 5-10HP 230-460VAC
Nm33211502/0707	MOTOR 1710RPM 230/460VAC 60HZ 2.7/1.33AMP 3PH
Sk-750/3-Fct	1HP 460V AC DR
19081952	
19141000	
1006488092	
850-36-40	GLUE GUN SINGLE MODULE
52897070	
275128d	CONTROL BOARD
Sk32f132s4	INPUT CARD
2sn63f-8 S/4	
Sk22f100l4	PC BOARD
Sk8282vf VI2 Iec250	
274793d	HOSE HOT MELT GLUE 240VAC 224W 8FT 1500PSI
1006488158	
Sk40003vt	DRIVE
Sk 160mh/4 Tf We	
Sk73-112m/4-2	
Hfd 511-460/100	Line Filter
Sk 80lh/4 Tf	
Sk4282ag-100-L/4	

Sk0182nb/Af/2g Iec	
Sk92-280sh/4 Bre800 Tf F Ig12	
Part No 700 For Sk12063azbh-100I/4	
Sk93-180m/4bre250tf	
7002003	DISPENSER HIGH PRECISION 0-15PSI 4DECIMAL
Ly 0 Rb 20 0	
Gve20I 19141000	
Sk71I/4bre5sr	
276884d	2304 CTRL PANEL
1006487622	
25045010	
1006488174	
Sk32132s4bre60	GEAR MOTOR
Sk21-Rv30-145tc	GEAR REDUCER 8.50HP 1.85RATIO 946RPM
278103000	SK700E-302-240-O Frequency Inverter SK700E-302-240-O
90sp/4 Tf 34011184	- in current IE3 version (mandatory from 0.75 KW) - like 34011170 Product name engine Engine speed 1,430 1 / min Power (kW) 1,100 Voltage (V) 230/400 Frequency (Hz) 50 Efficiency class IE3 Operating mode S1 Insulation class F Rated current 1 (AMP) 4,12 Rated current 2 (AMP) 2.38 Cosine 1 0.78 Motor position motor WN Pos 901 Thermal motor protection PTC thermistor, 3x155 ° C Circuit type star Degree of protection motor IP55 Terminal box position / cable insert 1 / I CE Logo Yes CCC Logo No. Painting instructions Without painting Weight approx. 15 KG / ST
25807201	
Sk12063 Af Bh66/3d	
7634f00g	CONTROL AND BRAKE 5.2AMP 460V 3HP INDUCTION MOTOR
2634s00	RELAY SOFT START SOLID STATE 460V 100-130AMP
Sk225mp/4 Bre400 H	
Sk30v-100I/4-2	
Sk500e221340a	INVERTER
Sk9012.1-N180tc	GEAR BOX10.85-1 RATIO 1770TQ/LBS MAX
1006487641	
1006488096	

8503591a	MODULE HOT MELT 240VAC 150W CLASSICBLUE KIT
Sk3282azb-80l/4	
Sk92-280sh/4	
1s32vf-71-S-4-2	MOTOR 5.40 RATIO 311RPM
80lp4cus	GEAR MOTOR
19020933	
Sk9032.1af-100lh/4 Tf	
52670000	
222297h	CONTROL BOARD
12080azsh	WORM GEARBOX 60HZ HOLLOW SHAFT B14 FLANGE
Sk-132m/4 Tf	
19011902	
Sk515e-133-340-A	INVERTER
Part No 620 For Sk12063azbh-100l/4	
63s/4 Bre5	
1006487635	
50871130	
Lr 76927	
Sk5282az Iec132-132mp/4 Tf	
1007513599	
Type Sk25 Fal- 100la, 4tf, I:6,82 M1	
Sk 160lh/4 Tffig12k	
Skh71-4b	
Sk90-221-100-R/40	GEAR MOTOR
12080az-Iec-90	WORM GEARBOX 0.50HP 60HZ HOLLOW SHAFT B14 FLANGE
100l/4	
Sk700e-151-340-A	INVERTER DRIVE 3PH 380-20 PERCENT 47-63HZ
91jj34aoa	MOTOR CONTROLLER 20/40HP 55AMP 230/460V
278102200	INVERTER DRIVE 3PH 380/480VAC 47-63HZ
50883300	

Sk52-160mh/4 Bre250 Kty F Ig12	
110593e	ELECTRIC RTD GUN E700W HEATER 240VAC 50/60HZ 200W
19031922	
Supporting Disc	
Sk-9042.1lxsek215	GEAR REDUCER DOUBLE SHAFT/FOOT W/SERVO ADAPTER
1006487639	
Sk9092.1 VI-225rp/4 Tf F	
Sk905/4bre20	
90lh/4 Bre20 Tf	-like 34712288 Product name engine Engine speed 1,415 1 / min Power (kW) 1,500 Voltage (V) 230/400 Frequency (Hz) 50 Efficiency class IE2 Operating mode S1 Insulation class F Rated current 1 (AMP) 5.80 Rated current 2 (AMP) 3.35 Cosine 1 0.79 Motor position motor WN Pos 109 Motor flange 250S Thermal motor protection PTC thermistor, 3x155 ° C Circuit type star Degree of protection motor IP55 Terminal box position / cable insert 1 / I CE Logo Yes CCC Logo No. Braking torque (Nm) 20 Brake voltages 220VWS-205VGS Degree of protection brake IP55 Painting instructions Without painting Weight approx. 25 KG / ST
Antr-Ritzel Z=29 D=38 M=3,00 Sk102	
100l/4-2	
1006487646	
90lp/4 Tf(34711678)	
Sk12063azd-71s/2 Bre5 HI Tf We	
1007329762	
Sk 02f VI-64 L4l	
Type Sk 9082.1 VI-180lx/4 Tf No. 200231192-10 10742000 , By Sk9082.1 VI-180lp/4 Tf F	
Type Sk01 F-AI- 80 L, 4tf, I:8,55 M1	
Sk6382afb100lp4c	GEAR REDUCER
Motordicht Sk82 450x350 Lk400 Nova2300	
Sk90-421-132-S/4	GEAR MOTOR
Sk5282af-180lh/4 Tf	
25811000	
50872050	

Sk700e-222-340-A	AC DRIVE
1006487644	
19100322	
2634r00	SOFT START 75HP 3PHASE 55KW
Sk1smid40vf-71s/4	
Type Sk25 Fal- 100l/4tf, I:8,09 M1	
Sk872.1f-VI-N250tc	SPEED REDUCER 3.69:1RATIO 2674LBS/IN
Ske5f Al-100 L/40-Tf T1 Oem For Allweiler	
Sk700e-551-340-A-Kar	DRIVE INVERTER 17AMP 3PH 380-480VAC 5.5KW
Sk1500/3ct	2HP 460V AC DR
275128b	CONTROL BOARD
310675	CONTROLLER BOARD FOAM MELT 130
19021902	
Sk9042,1 Azksh-100l/4	
180lx/4	
Sk51ef-180mp/4 Tf	
Part No 632 For Sk12063azbh-100l/4	
Sk-500e-551-340-A	DRIVE 12.5AMP 3PHASE 380-480VAC 5.5KW
Leva 5nm P	
Sk250/2 Cb	Compact Drive
Sk515e112340a	FREQUENCY INVERTER
Sk4282azbvlf	GEAR BOX
Sk11ef-71l/4 Tf I:2,04 Obsolete!! Replaced By Sk171.1f-71l/4 Tf	
19100222	
230260s	CONTROL PANEL