


Torex

Garanti: 12 ay
Bu ürüne ait Türkiye içi kapı teslim fiyat ve teslim süresi içeren teklifimizi almak için info@yursat.com.tr e-posta adresine başvuru yapılabilir ya da ayrıntılı bilgi için +90 224 240 03 04 numaralı telefonumuzdan bizlere ulaşabilirsiniz.
Torex Markası, tedarik süresi için lütfen bizimle iletişime geçiniz.

Firmamız Torex Türkiye Distribütörü veya temsilcisi değildir. Firmamız sipariş durumunda, belirtilen ürünlerde sadece Orjinal ve yeni ürün teklifi sunmaktadır. Bu sitede gösterilen Özel marka adları ve ticari markalar ilgili sahiplerinin mülkiyetindedir, talep durumunda kaldırılmaktadır.



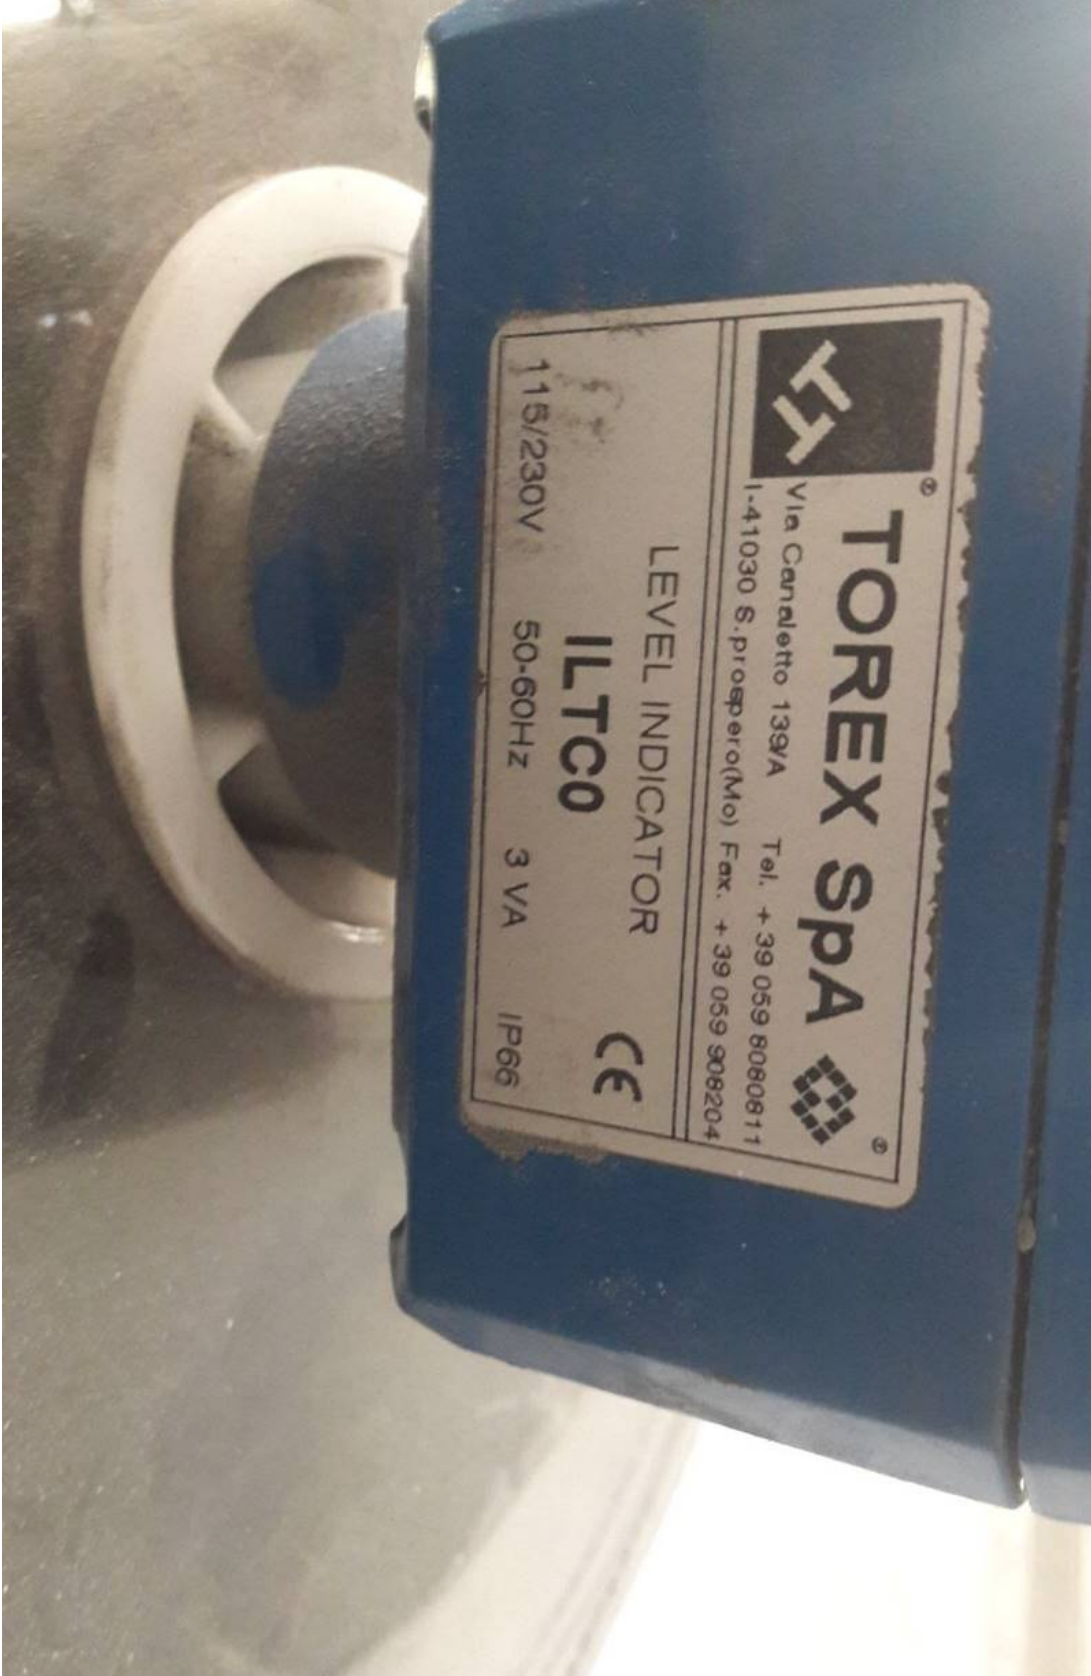

Ürün	Açıklama
IltD0	Level indicator as a 24 V / DC rotary wing indicator Connection thread G 1-1 / 2 and G 2-1 / 2; IP65, EN60529 Aluminum housing, detector shaft and paddle made of stainless steel
ILTC0X	Level indicator as rotary paddle switch, ATEX II 1/2D Dust Ex 230 V / 50 Hz, connection thread G 1-1/2; IP65, EN60529 Aluminum housing, detector shaft and paddle made of stainless steel
ILTC0	Level indicator as rotary paddle switch 115/230 V / 50-60 Hz Connection thread G 1-1/2 and G 2-1/2; IP65, EN60529 Aluminum housing, detector shaft and paddle made of stainless steel
Rotating Level Probe	
Rv0200080	
IltA0-S	
(Nmbc03729032016) IltD0	
V5vv80	
Spi Iltop 24v, 3w	
Ilva01ea31	
Rv023010000	
To.900	
Vab080000001	
8202mo1730	Manual adjustment gear for the RV02V cellular wheel sluice
Ilva0	
Iltco Bx	
Asi-T2-2a-840 For 2g-2h	
Rv02/30	
Ilt	
Level Indicatör 115/230v 50-60hz	
IltDoax	
576a2200000	
Asi-T2-2a-1380	
Iltc0 Level Indicator	

Iltc0	Level Indikator ILTC0 115 / 230 V 50 - 60 Hz 3 VA IP 66
Iltc0 110/230 V / 50-60 Hz G 1-1/2 Sowie G 2-1/2 En60529	
7202st0100	Angular gear to the RV2 and RV5 rotary valve i = 1:49, 20/30 min-1, to motor flange B14 RMI401800 housing type 85, flange type F2-
Mv0710b04145	Electric motor 0.37 kW / 4-polyg 230/400 V - 50 Hz / IP54 / ISO F / B5
Rv053010000	
4538020100	
S/N 0200317314 K010iltd0ax	
Q204x280-8	
15-11-13-10	
Rv02/Vm	Cell wheel lock type RV02 Drive 0.37 kW / 4-22 min-1 with manual control gear Flow rate 0.42-2.3 cbm / h at 80% filling level Hole pattern above: standard Hole pattern below: standard Rotor volume 2 liters, divided into 8 pockets Housing and rotor made of gray cast iron, primed Inlet and outlet cross section 150x150 mm Rotor diameter 180 mm Weight 63 kg * TOREX version *
Rv0200020	
Iltc0 Level Indicator 110/220 V 50 Hz	
Ipm4001	
7202st0300	
Iltc2	
Iltr0	
Torex Spa 200	
Iisc0a1d1e	
Iltc0s230 4538020100	
Mic 23	
Asi-T2-2a-1650	
115/230 V/Ac	